


Other Specialty Tape

Customized to your needs.

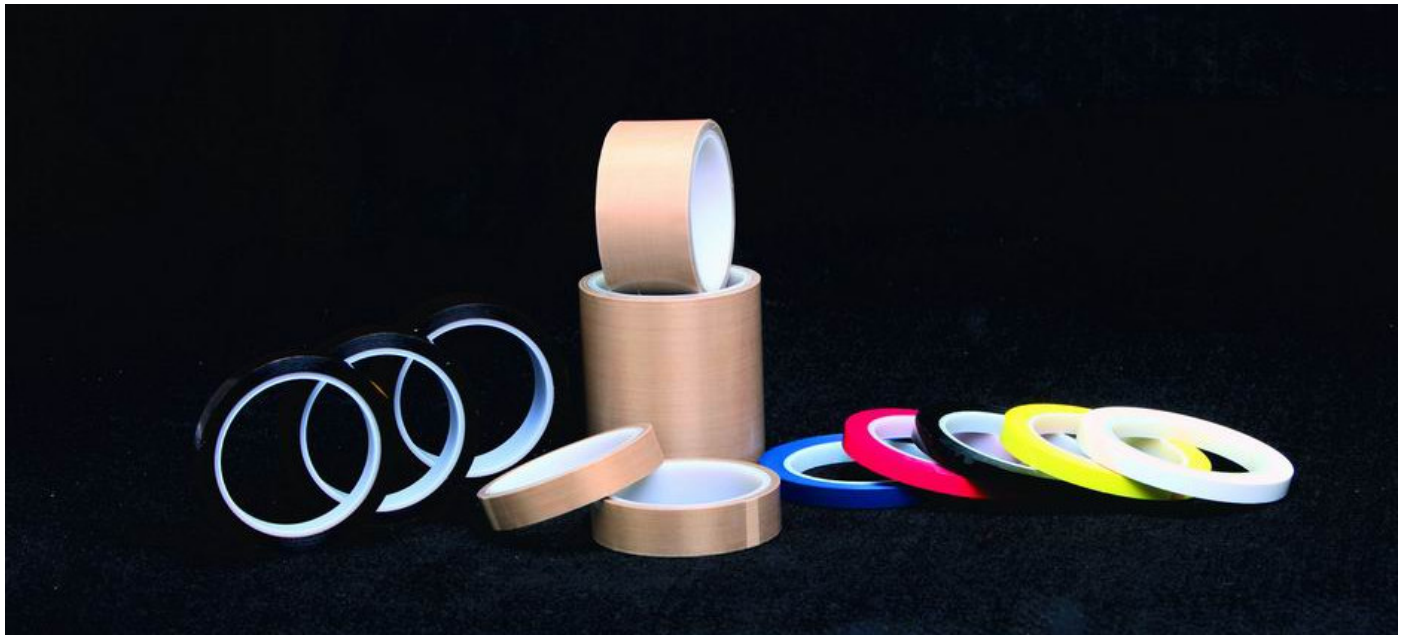

Description:

Tapes Customize to your needs. 0.0025mm polyester film.

Good adhesion & heat, solvent resistance for insulation purpose UL recognized.

UL listed and Flame retardant. Excellent insulation material for electrical purposes.

Excellent heat & solvent resistant. Good for soldering process (250C for few seconds)

Green in colour. Polyester backing coater with Silicon adhesive. Good conformability.

Heat resistance, suitable for heat sealing and packing and also non corrosion from chemicals.

Mailing Address: No. 10, Jalan SL 14/2, Bandar Sungai Long, 43000 Kajang Selangor. Malaysia

Tel/Fax: +603-9080 3600 **Mobile:** +6 016 369 1313

Email : sales@zonsan.com **Website:** <http://www.zonsan.com>

Page: 1 of 2

Technical Specifications;

Item No.	Desc.	Thickness (mm)	Adhesion (G/25mm)	Tensile Strength (KG/25mm)	Elongation (%)	Dielectric Breakdown Voltage	Features
101404	Polyester Tape	0.055	600	9	75	4 KV	0.025mm polyester film. Good adhesion & heat, solvent resistance for insulation purpose. UL recognized.
101406	Acetate Cloth Tape	0.24	1200	6.4	20	3.7 KV	UL listed and Flame retardant. Excellent insulation material for electrical purpose.
101448	Kapton Tape	0.065	700	11	50	-	Excellent heat & solvent resistant. Good for soldering process. (250 C for few seconds)
101458	Gold Plating Tape	0.075	900	9	80	-	Green in color. Polyester backing coated with silicone adhesive. Good conformability.
101468	Teflon Glass Cloth Tape	0.130	-	19.00	-	-	Heat resistance, suitable for heat sealing packing and also no corrosion from chemicals.